



Spec No. :DS23-2016-0137 Effective Date: 06/10/2017

Revision: B

**LITE-ON DCC** 

RELEASE

BNS-OD-FC001/A4



### 1. Description


The LiteON 5630 Product series is a wide beam angle standard-dimension package, combining the lifetime and reliability advantages of Light Emitting Diodes with the brightness of conventional lighting. It gives you total design freedom and unmatched brightness, creating a new opportunities for solid state lighting to displace conventional lighting technologies.

#### 1.1 Features

- Package in 8mm tape on 7" diameter reels.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- EIA STD package.
- I.C. compatible.
- Meet green product and Pb-free(According to RoHS)



### 2. Outline Dimensions

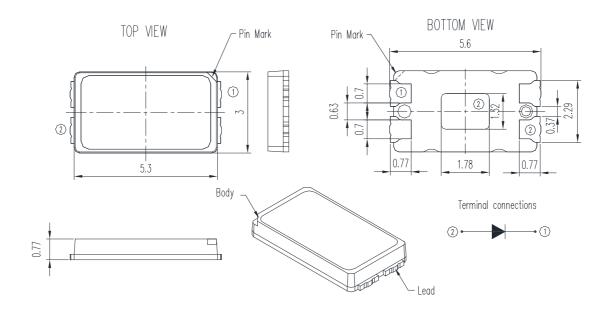

| Part No.      | Lens Color | Source Color    |
|---------------|------------|-----------------|
| LTW-5630SD530 | Clean      | Green InGaN/GaN |

### Notes:

- 1. All dimensions are in millimeters.
- 2. Tolerance is ±0.2 mm (.008") unless otherwise noted.



### 3. Absolute Maximum Ratings at Ta=25℃

| Parameter                   | Symbol                                  | Rating   | Unit |
|-----------------------------|---|----------|------|
| DC Forward Current          | l <sub>F</sub>                          | 150      | mA   |
| Pulsed Forward Current (*1) | Current (*1) I <sub>FP</sub> 200        |          | mA   |
| Power Dissipation           | Power Dissipation P <sub>D</sub>        |          | mW   |
| Operating Temperature       | $T_{opr}$                               | -40~+85  | °C   |
| Storage Temperature         | $T_{stg}$                               | -40~+100 | ∘C   |
| Junction Temperature        | Junction Temperature T <sub>j</sub> 110 |          | °C   |

#### Notes:

1. 1/10 duty cycle, Pulse width 10msec.



### 4. Electro-Optical Characteristics

### **4.1 Typical Performance**

| Parameter                | Symbol                | Values |       | Unit        | Test Condition               |
|--------------------------|-----------------------|--------|-------|-------------|------------------------------|
|                          |                       | Min    | 36    |             |                              |
| Luminous Flux            | Ф٧                    | Тур.   | 50    | lm          |                              |
|                          |                       | Max.   | 64    |             |                              |
| Radiant Flux             | Фе                    | Тур.   | 96    | mW          |                              |
| Photon Flux              | PPF                   | Тур.   | 0.427 | $\mu$ mol/s |                              |
|                          |                       | Min    | 520   |             |                              |
| Dominant Wavelength      | Wd                    | Тур.   | 530   | nm          |                              |
|                          |                       | Max.   | 540   |             |                              |
| Peak Wavelength          | W <sub>P</sub>        | Тур.   | 525   | nm          | <i>I</i> <sub>F</sub> =150mA |
| Spectral Line Half-width | Δλ                    | Тур.   | 30    | nm          |                              |
| Viewing angle            | <b>2</b> θ 1/2        | Тур.   | 120   | deg         |                              |
|                          |                       | Min    | 3.0   |             |                              |
| Forward Voltage          | VF                    | Тур.   | 3.2   | V           |                              |
|                          |                       | Max.   | 3.8   |             |                              |
| Reverse Current          | <i>I</i> <sub>R</sub> | Max.   | 10    | μΑ          | V <sub>R</sub> =-5V          |

#### **Notes**

- 1. Flux and Dominant Wavelength are the total flux output as measured with an integrating sphere.
- 2. Flux classification code is marked on each packing bag.
- 3. CAS-140B is the test standard for flux & Dominant Wavelength & Voltage.



### 4.2 Typical Electrical / Optical Characteristics Curves

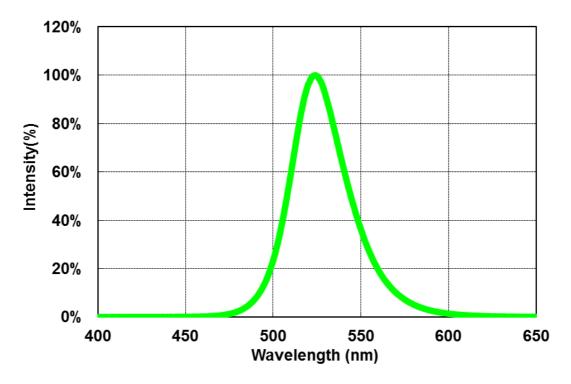


Fig1. Relative Spectrum of Emission

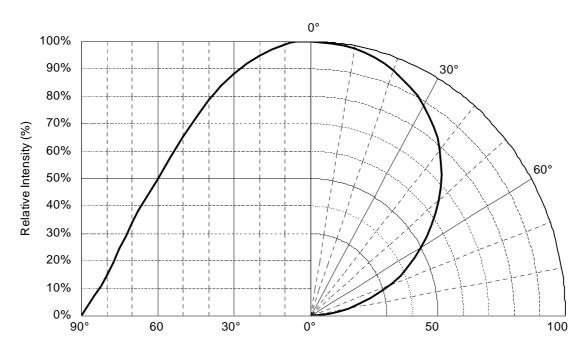


Fig2. Radiation Characteristics



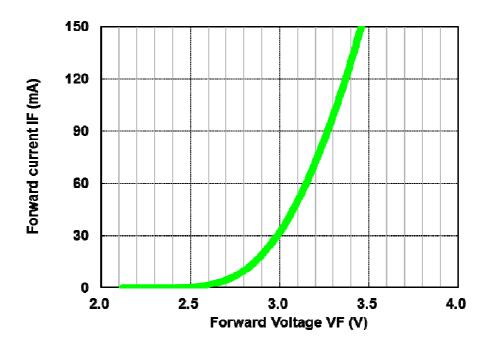


Fig3. Forward Current vs. Voltage

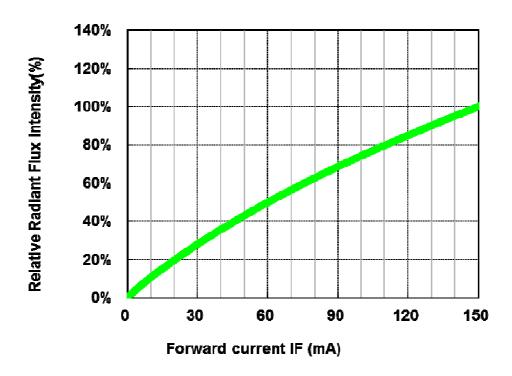


Fig.4. Forward Current vs. Relative Radiant Flux



### 5. Bin Code List

| Forward Voltage Spec. Table |                   |     |  |  |
|-----------------------------|-------------------|-----|--|--|
| V₅ Bin                      | IF =150mA, Ta=25℃ |     |  |  |
| At DIII                     | Min Max           |     |  |  |
| 8                           | 3.0               | 3.2 |  |  |
| 9                           | 3.2               | 3.4 |  |  |
| 10                          | 3.4               | 3.6 |  |  |
| 11                          | 3.6               | 3.8 |  |  |

| Luminous Flux Table |                   |     |  |  |
|---------------------|-------------------|-----|--|--|
| Im code             | IF =150mA, Ta=25℃ |     |  |  |
| iiii code           | Min               | Max |  |  |
| G3                  | 36                | 40  |  |  |
| G4                  | 40                | 43  |  |  |
| G5                  | 43                | 48  |  |  |
| G6                  | 48                | 53  |  |  |
| G7                  | 53                | 58  |  |  |
| G8                  | 58                | 64  |  |  |

| Dominant Wavelength Spec. Table |         |     |  |  |
|---------------------------------|---------|-----|--|--|
| IF =150mA, Ta=25℃               |         |     |  |  |
| W <sub>d</sub> Bin              | Min Max |     |  |  |
| D15                             | 520     | 525 |  |  |
| D16                             | 525     | 530 |  |  |
| D17                             | 530     | 535 |  |  |
| D18                             | 535     | 540 |  |  |

### Notes

- 1. The flux is operated performance with forward current 150mA per die.
- 2. Flux is the total luminous flux output as initial measured with an integrated sphere.
- 3. Forward Voltage (V<sub>F</sub>) measurement allowance is ±0.1V.
- 4. Flux measurement allowance is ±10%.



5. Wavelength allowance is ±5nm


### **% Notes: Full Rank on Label**

Example: 8/G5/D15

| Forward Voltage Rank | Luminous flux Rank | Dominant Wavelength Rank |
|----------------------|--------------------|--------------------------|
| 8                    | G5                 | D15                      |



### 6. Reflow Soldering Characteristics

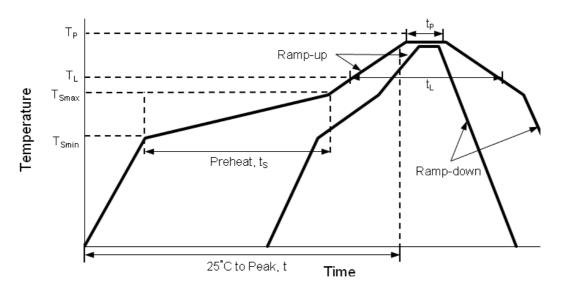

| Profile Feature   | Lead Free Assembly |
|---|--------------------|
| Average Ramp-Up Rate (T <sub>Smax</sub> to T <sub>P</sub> ) | 3℃ / second max    |
| Preheat Temperature Min (Tsmin)                             | 150℃               |
| Preheat Temperature Max (T <sub>Smax</sub> )                | 200℃               |
| Preheat Time (t <sub>Smin</sub> to t <sub>Smax</sub> )      | 60 – 180 seconds   |
| Time Maintained Above Temperature (T <sub>L</sub> )         | 217℃               |
| Time Maintained Above Time (t <sub>L</sub> )                | 60 - 150 seconds   |
| Peak / Classification Temperature (T <sub>P</sub> )         | 260℃               |
| Time Within 5℃ of Actual Peak Temperature (t P)             | 5 seconds          |
| Ramp – Down Rate  | 6℃ / second max    |
| Time 25℃ to Peak Temperature                                | 8 minutes max      |



#### **Notes:**

- 1. The LEDs can be soldered using the reflow soldering or hand soldering method. The recommended hand soldering condition is 350 ℃ max. and 2 secs max. for one time only, and the recommended reflow soldering condition is 260 ℃ max. and 5 secs max. for three times max.
- 2. All temperatures refer to topside of the package, measured on the package body surface.
- 3. The soldering condition referring to J-STD-020B. The storage ambient for the LEDs should not exceed 30 ℃ temperature or 70% relative humidity. It is recommended that LEDs out of their original packaging are soldered within one week. For extended storage out of their original packaging, it is recommended that the LEDs were stored in a sealed container with appropriate desiccant, or desiccators with nitrogen ambient. If the LEDs were unpacked more than 168hrs, baking the LEDs at 60 °C for 24hrs before soldering process.
- 4. The soldering profile could be further referred to different soldering grease material characteristic. The grease vendor will provide this information.
- 5. A rapid-rate process is not recommended for the LEDs cooling down from the peak temperature.
- 6. Although the recommended reflow conditions are specified above, the reflow or hand soldering condition at the lowest possible temperature is desirable for the LEDs.
- LiteOn cannot make a guarantee on the LEDs which have been already assembled using the dip soldering method.

Part No. : LTW-5630SD530 BNS-OD-FC002/A4



### 7. Reliability Test

| No | Test item  | Test Condition                                | Duration  | Number of<br>Damaged |
|----|--|---|-----------|----------------------|
| 1  | Operating Test                                     | Ta=25℃, IF=150mA                              | 1,000hrs  | 0/20                 |
| 2  | High Temp. Operating Test                          | Ta=85℃, IF=150mA                              | 1,000hrs  | 0/20                 |
| 3  | High Humidity Operating Test                       | Ta=85℃, RH=85%, IF=1 50mA                     | 1,000hrs  | 0/20                 |
| 4  | Low Temp. Operating Test                           | Ta=-40℃, IF=150mA                             | 1,000hrs  | 0/20                 |
| 5  | High Temp. Storage Test                            | Ta=100℃                                       | 1,000hrs  | 0/20                 |
| 6  | Low Temp. Storage Test                             | Ta=-40℃                                       | 1,000hrs  | 0/20                 |
| 7  | Temperature Cycle Test                             | Ta= -40℃, 30min . ~25℃, 5min . ~100℃, 30min . | 100 cycle | 0/20                 |
| 8  | Resistance to Soldering Heat<br>(Reflow Soldering) | Tsld=260℃ , 10sec                             | 2 times   | 0/20                 |

### Criteria for Judging the Damage

| Item            | Item Symbol Test Condition | Criteria for Judgment |                    |                    |
|-----------------|----------------------------|-----------------------|--------------------|--------------------|
| item            | Syllibol                   | rest Condition        | Min.               | Max.               |
| Forward Voltage | VF                         | I⊧=150 mA             | -                  | Initial Value ×1.1 |
| flux            | Фν                         | I₅=150 mA             | Initial Value ×0.7 | _                  |
| Reverse Current | lr                         | V <sub>R</sub> =-5V   | -                  | 10µA               |



### 8. User Guide


### Cleaning

Do not use unspecified chemical liquid to clean LED they could harm the package. If cleaning is necessary, immerse the LED in ethyl alcohol or isopropyl alcohol at normal temperature for less than one minute.


#### Recommend Printed Circuit Board Attachment Pad


#### Infrared / vapor phase

### **Reflow Soldering**

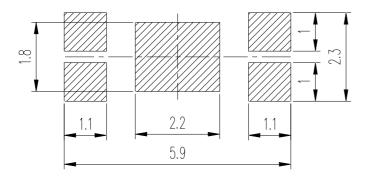


### Package Dimensions of Tape

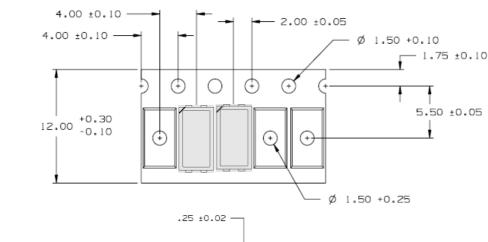








Note: 01. The tolerance unless mentioned is±0.1mm 02. The measured unit is "mm"

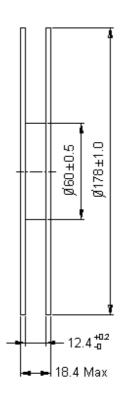

### Notes:

- 1. Empty component pockets sealed with top cover tape.
- 2. 7 inch reel-3000 pieces per reel.
- 3. Minimum packing quantity is 500 pieces for remainders.
- 4. The maximum number of consecutive missing lamps is two.
- 5. In accordance with EIA-481-1-B specifications.



### 9. Cautions

### 9.1 Application

The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications). Consult Liteon's Sales in advance for information on applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices).

#### 9.2 Storage

This product is qualified as Moisture sensitive Level 3 per JEDEC J-STD-020 Precaution when handing this moisture sensitive product is important to ensure the reliability of the product.

The package is sealed:

The LEDs should be stored at 30℃ or less and 90%RH or less. And the LEDs are limited to use within one year, while the LEDs is packed in moisture-proof package with the desiccants inside.

The package is opened:

The LEDs should be stored at 30℃ or less and 60%RH or less. Moreover, the LEDs are limited to solder process within 168hrs. If exceeding the storage limiting time since opened, that we recommended to baking LEDs at 60℃ at least 24hrs. To seal the remainder LEDs return to package, it's recommended to be with workable desiccants in original package.

#### 9.3 Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED if necessary.

#### 9.4 Drive Mode

An LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below



- (A) Recommended circuit.
- (B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

LED



### 9.5 ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED. Suggestions to prevent ESD damage:

- Use of a conductive wrist band or anti-electrostatic glove when handling these LEDs.
- All devices, equipment, and machinery must be properly grounded.
- Work tables, storage racks, etc. should be properly grounded.
- Use ion blower to neutralize the static charge which might have built up on surface of the LED's
  plastic lens as a result of friction between LEDs during storage and handling.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or "no lightup" at low currents. To verify for ESD damage, check for "light up" and  $V_F$  of the suspect LEDs at low currents. The  $V_F$  of "good" LEDs should be >2.0V@0.1mA for InGaN product and >1.4V@0.1mA for AllnGaP product.

#### 9.6 Suggested Checking List:

- Training and Certification
  - 1. Everyone working in a static-safe area is ESD-certified?
  - 2. Training records kept and re-certification dates monitored?
- Static-Safe Workstation & Work Areas
  - 1. Static-safe workstation or work-areas have ESD signs?
  - 2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V?
  - 3. All ionizer activated, positioned towards the units?
  - 4. Each work surface mats grounding is good?
- Personnel Grounding
  - Every person (including visitors) handling ESD sensitive (ESDS) items wear wrist strap, heel strap or conductive shoes with conductive flooring?
  - 2. If conductive footwear used, conductive flooring also present where operator stand or walk?
  - 3. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V\*?
  - 4. Every wrist strap or heel strap/conductive shoes checked daily and result recorded for all DLs?
  - 5. All wrist strap or heel strap checkers calibration up to date?



Note: \*50V for Blue LED.

#### Device Handling

- 1. Every ESDS items identified by EIA-471 labels on item or packaging?
- 2. All ESDS items completely inside properly closed static-shielding containers when not at static-safe workstation?
- 3. No static charge generators (e.g. plastics) inside shielding containers with ESDS items?
- 4. All flexible conductive and dissipative package materials inspected before reuse or recycle?

#### Others

- 1. Audit result reported to entity ESD control coordinator?
- 2. Corrective action from previous audits completed?
- 3. Are audit records complete and on file?

#### 9.7 Others:

- Do not put any pressure on the light emitting surface either by finger or any hand tool and do not stack the products. Stress or pressure may cause damage to the wires of the LED array.
- This product is not designed for the use under any of the following conditions, please confirm the performance and reliability are well enough if you use it under any of the following conditions
- Do not use sulfur-containing materials in commercial products including the materials such as seals and adhesives that may contain sulfur.
- Do not put this product in a place with a lot of moisture (over 85% relative humidity), dew condensation, briny air, and corrosive gas (Cl, H<sub>2</sub>S, NH<sub>3</sub>, SO<sub>2</sub>, NO<sub>X</sub>, etc.), exposure to a corrosive environment may affect silver plating.
- The appearance and specifications of the product may be modified for improvement without prior notice.





### **Revision History:**

**Revision Date:** 

Last Version:

| Version | Page  | Content of Change              | Date<br>Record |
|---------|-------|--------------------------------|----------------|
| 4.0     | A 11  |                                |                |
| 1.0     | All   |                                | 01/25/2017     |
| 2.0     | 4,7,8 | Remove G1/G2, add G6/G7/G8 bin | 06/02/2017     |
|         |       |                                |                |
|         |       |                                |                |
|         |       |                                |                |
|         |       |                                |                |
|         |       |                                |                |
|         |       |                                |                |
|         |       |                                |                |
|         |       |                                |                |
|         |       |                                |                |