



LED Display Product Data Sheet LTS-4801CB

Spec No.: DS30-2009-0200

Effective Date: 04/23/2011

Revision: -

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4

LED DISPLAY**LTS-4801CB
DATASHEET**

| <u>Rev</u> | <u>Description</u> | <u>By</u> |
|-----------------------------------------------------|----------------------------------|------------------------------------------|
| 01 | ORIGINAL | <u>KITTISAK B</u> <u>MAY 12/2008</u> |
| | | |
| <u>Above data for PD and Customer tracking only</u> | | |
| - | NPPR Received and Upload on OPNC | <u>KITTISAK B.</u> <u>Nov 24/2009</u> |
| | | |
| | | |
| | | |
| | | |

SPEC. NO.: DS30-2009-0200DATE : Nov 24/2009REV. NO. : -PAGE NO. : 0 OF 5

FEATURES

- * 0.4 inch (10.0 mm) DIGIT HEIGHT
- * CONTINUOUS UNIFORM SEGMENTS
- * LOW POWER REQUIREMENT
- * EXCELLENT CHARACTERS APPEARANCE
- * HIGH BRIGHTNESS & HIGH CONTRAST
- * WIDE VIEWING ANGLE
- * SOLID STATE RELIABILITY
- * CATEGORIZED FOR LUMINOUS INTENSITY
- * **LEAD-FREE PACKAGE (ACCORDING TO ROHS)**


DESCRIPTION

The LTS-4801CB is a 0.4 inch (10.0 mm) digit height single digit seven-segment display. This device uses InGaN BLUE LED chips (InGaN epi on SiC substrate). The display has a gray face and white segments.

DEVICE


| PART NO. | DESCRIPTION |
|-----------------|--------------------|
| InGaN BLUE | Common Anode |
| LTS-4801CB | Rt. Hand Decimal |

PACKAGE DIMENSIONS

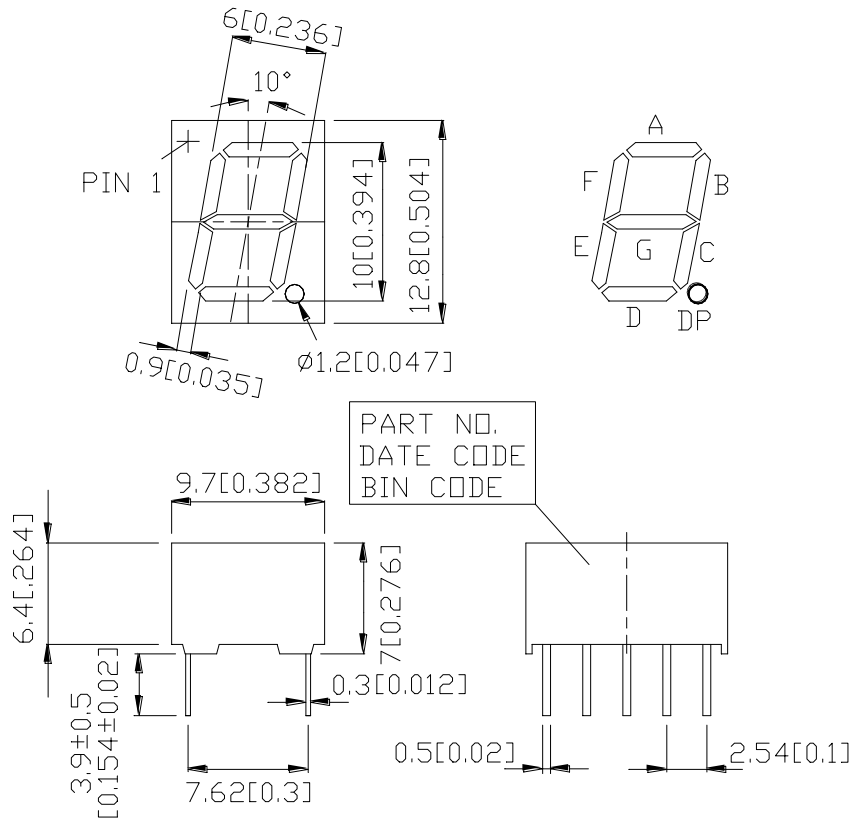

- NOTES: 1. All dimensions are in millimeters. Tolerances are ± 0.25 mm (0.01") unless otherwise noted.
- Pin tip's shift tolerance is ± 0.4 mm.
 - Foreign material on segment $\cong 10$ mils
 - Ink contamination (surface) $\cong 20$ mils
 - Bending $\cong 1\%$ of reflector length
 - Bubble in segment $\cong 10$ mils

INTERNAL CIRCUIT DIAGRAM

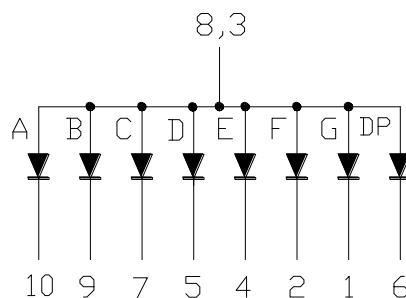

PIN CONNECTION

| No. | CONNECTION |
|------------|-------------------|
| 1 | CATHODE G |
| 2 | CATHODE F |
| 3 | COMMON ANODE |
| 4 | CATHODE E |
| 5 | CATHODE D |
| 6 | CATHODE DP |
| 7 | CATHODE C |
| 8 | COMMON ANODE |
| 9 | CATHODE B |
| 10 | CATHODE A |

ABSOLUTE MAXIMUM RATING

| PARAMETER | MAXIMUM RATING | UNIT |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------|--------------------|
| Power Dissipation Per Segment | 115 | mW |
| Peak Forward Current Per Segment (Frequency 1Khz, 10% duty cycle) | 60 | mA |
| Continuous Forward Current Per Segment | 30 | mA |
| Forward Current Derating from 25 ⁰ C | 0.28 | mA/ ⁰ C |
| Reverse Voltage Per Segment | 5 | V |
| Operating Temperature Range | -35 ⁰ C to +105 ⁰ C | |
| Storage Temperature Range | -35 ⁰ C to +105 ⁰ C | |
| Soldering Condition: 1/16 inch below seating plane for 3 seconds at 260 ⁰ C., or temperature of unit (during assembly) not over max. temperature rating above. | | |

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25⁰C

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT | TEST CONDITION |
|-----------------------------------------------------------|-------------------|------|------|-------|------|--------------------|
| Average Luminous Intensity Per Segment | IV | 3400 | 7626 | | μcd | IF=10mA |
| Peak Emission Wavelength | λp | | 468 | | nm | IF=5mA |
| Spectral Line Half-Width | Δλ | | 25 | | nm | IF=5mA |
| Dominant Wavelength | λd | | 470 | | nm | IF=5mA |
| Forward Voltage Per Segment | V _F | 2.5 | | 3.5 | V | IF=5mA |
| Reverse Current Per Segment | I _R | | | 100 | μA | V _R =5V |
| Luminous Intensity Matching Ratio (Similar Light Area) | I _v -m | | | 2 : 1 | | IF=10mA |

Note: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

2. Cross talk specification \cong 2.5%

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

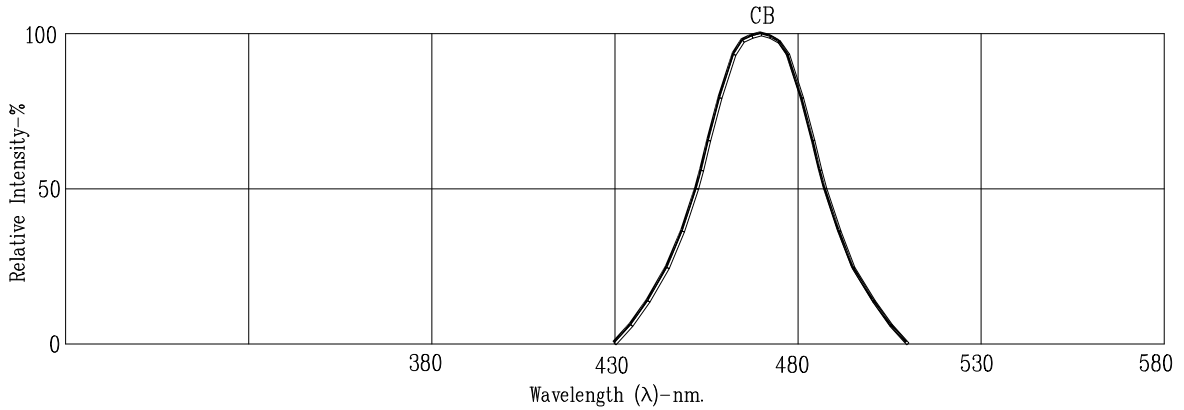


Fig1. RELATIVE INTENSITY VS. WAVELENGTH

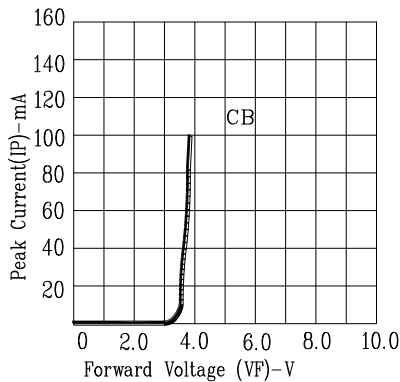


Fig3. FORWARD CURRENT VS. FORWARD VOLTAGE

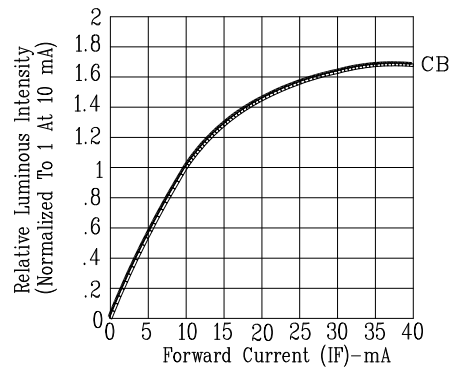


Fig4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

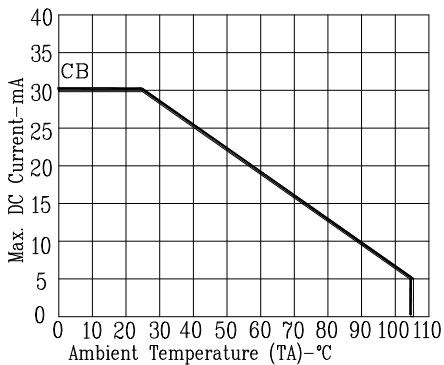


Fig5. MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE.

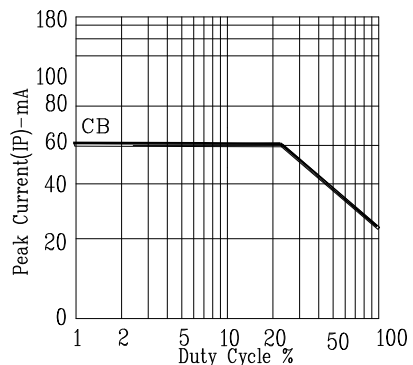


Fig6. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)

NOTE: CB=InGaN Blue