



# **SMD LED**

## **Product Data Sheet**

### **LTSA-G6SPVAKT**

Spec No.:

Created Date: 2017/11/14

Revision: 1.0

**BNS-OD-FC001/A**

**LITE-ON Technology Corp. / Optoelectronics**

No.90,Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C.

Tel: 886-2-2222-6181 Fax: 886-2-2221-1948 / 886-2-2221-0660

<http://www.liteon.com/opto>



**SMD LED**  
**LTSA-G6SPVAKT**

**SMD LED**

LTSA-G6SPVAKT

| <u>Rev</u>                                   | <u>Description</u> | <u>By</u> | <u>Date</u> |
|--|--------------------|-----------|-------------|
| 1  | New datasheet      | Ryan Chen | 11/14/2017  |
|  |                    |           |             |
|  |                    |           |             |
|  |                    |           |             |
|  |                    |           |             |
|  |                    |           |             |
| Above data for PD and Customer tracking only |                    |           |             |
|  |                    |           |             |
|  |                    |           |             |
|  |                    |           |             |
|  |                    |           |             |
|  |                    |           |             |
|  |                    |           |             |

**Customer Name:**

**Customer Signature:**

**Print Name:**

**LiteON Sales Signature:**

**Print Name:**



## SMD LED LTSA-G6SPVAKT

### 1. Description

SMD LEDs from Lite-On are available in miniature sizes and special configurations for automated PC board assembly and space-sensitive applications. These SMD LEDs are suitable for the accessory of engineering vehicles.


#### 1.1 Features

- Meet ROHS
- Package in 12mm tape on 7" diameter reels
- Preconditioning: accelerate to JEDEC level 3
- EIA STD package
- I.C. compatible
- Compatible with automatic placement equipment
- Compatible with infrared reflow solder process

#### 1.2 Applications

- Automotive: accessory applications

### 2. Package Dimensions

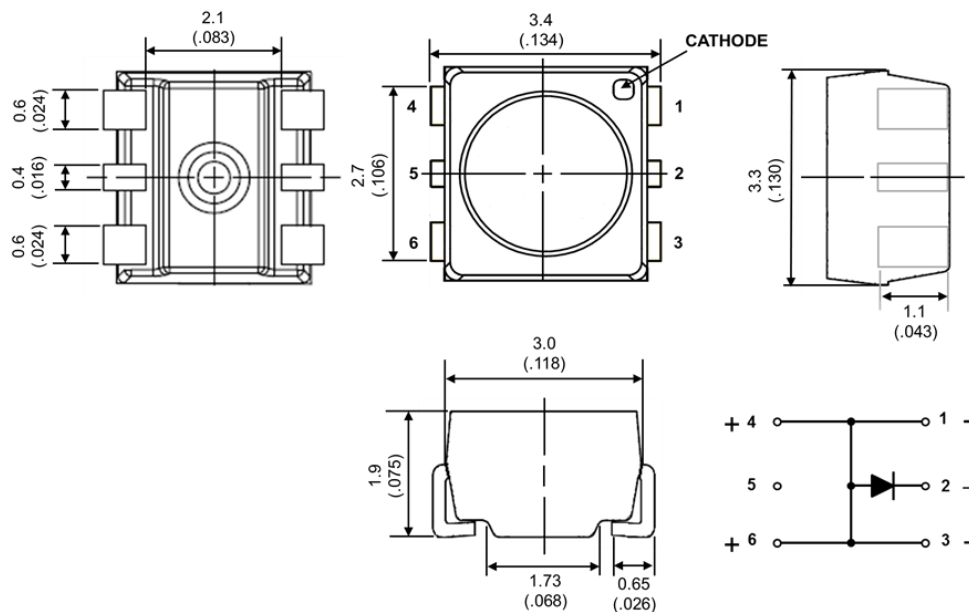

| Part No.      | Lens Color  | Source Color  |
|---------------|-------------|---------------|
| LTSA-G6SPVAKT | Water Clear | AllnGaP Amber |

#### Notes:

1. All dimensions are in millimeters.
2. Tolerance is  $\pm 0.2$  mm (.008") unless otherwise noted.
3. ANODE lead frame is heat sink of LED.



# SMD LED LTSA-G6SPVAKT

## 3. Rating and Characteristics

### 3.1 Absolute Maximum Ratings at Ta=25°C

| Parameter  | LTSA-G6SPVAKT         | Unit |
|--|-----------------------|------|
| Power Dissipation  | 500                   | mW   |
| Peak Forward Current<br>(1/10 Duty Cycle, 0.1ms Pulse Width) | 400                   | mA   |
| DC Forward Current Range                                     | 5...200               | mA   |
| Operating Temperature Range                                  | -40°C to +100°C       |      |
| Storage Temperature Range                                    | -40°C to + 100°C      |      |
| Infrared Soldering Condition                                 | 260 °C For 10 Seconds |      |

Note : DC Forward minimum current is 5mA, Maximum is 200mA (Fig 3&5)

### 3.2 Thermal Characteristics

| Parameter  | Symbol         | TYP. | MAX. | Unit  |
|--|----------------|------|------|-------|
| Thermal Resistance (Junction – Ambient) <sup>Note</sup>      | Rth JA         | 50   | -    | °C /W |
| Thermal Resistance (Junction – Solder Point) <sup>Note</sup> | Rth JS         | 30   | -    | °C /W |
| Junction Temperature   | T <sub>J</sub> | -    | 125  | °C    |

Note: Rth JA Measurement Condition


Substrate: FR4 (t=1.6mm) / Pattern Size: 16mm<sup>2</sup>



**SMD LED**  
**LTSA-G6SPVAKT**

**3.3 Suggest IR Reflow Condition for Pb Free Process:**

IR-Reflow Soldering Profile for lead free soldering (Acc. to J-STD-020)

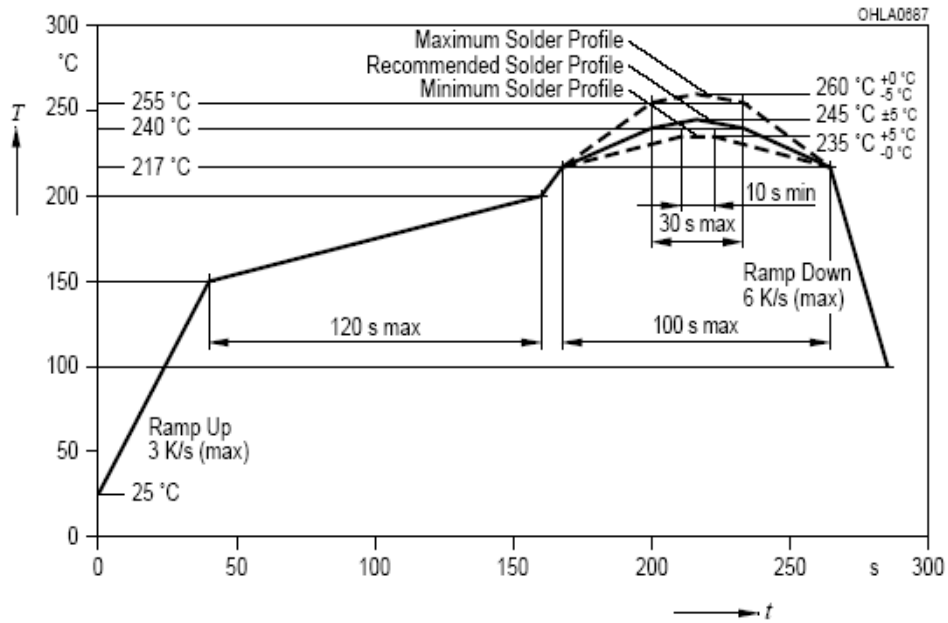



## SMD LED LTSA-G6SPVAKT

### 3.4 Electrical / Optical Characteristics at Ta=25°C

| Parameter                | Symbol            | Part No.<br>LTSA- | Min. | Typ. | Max. | Unit | Test Condition               |
|--------------------------|-------------------|-------------------|------|------|------|------|------------------------------|
| Luminous Intensity       | IV                | G6SPVAKT          | 7.1  | -    | 11.2 | cd   | IF = 140mA<br>Note 1         |
| Viewing Angle            | 2θ <sub>1/2</sub> | G6SPVAKT          | -    | 120  | -    | deg  | Note 2 (Fig.2)               |
| Peak Emission Wavelength | λ <sub>P</sub>    | G6SPVAKT          | -    | 625  | -    | nm   | Measurement<br>@Peak (Fig.1) |
| Dominant Wavelength      | λ <sub>d</sub>    | G6SPVAKT          | 612  | -    | 624  | nm   | IF = 140mA<br>Note 3         |
| Spectral Line Half-Width | Δλ                | G6SPVAKT          | -    | 18   | -    | nm   |                              |
| Forward Voltage          | V <sub>F</sub>    | G6SPVAKT          | 1.90 | -    | 2.50 | V    | IF = 140mA<br>Note 4         |
| Reverse Current          | I <sub>R</sub>    | G6SPVAKT          | -    |      | 10   | μA   | VR =12V<br>Note 5            |

#### Notes:

1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve
2. θ<sub>1/2</sub> is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
3. The dominant wavelength, λ<sub>d</sub> is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device. Dominate Wavelength Tolerance is +/- 1nm.
4. Forward Voltage Tolerance is +/- 0.1 volt.
5. Reverse voltage (VR) condition is applied to I<sub>R</sub> test only. The device is not designed for reverse operation



## SMD LED LTSA-G6SPVAKT

### 4. Bin Rank

Batch Description on Label: Vf / Iv/Wd ( Ex. F/EA/3)

#### ■ Vf Rank

| Forward Voltage (Vf) |      | Unit : V @140mA |
|----------------------|------|-----------------|
| Bin Code             | Min. | Max.            |
| C                    | 1.90 | 2.05            |
| D                    | 2.05 | 2.20            |
| E                    | 2.20 | 2.35            |
| F                    | 2.35 | 2.50            |

Tolerance on each Voltage bin is +/-0.1V

#### ■ IV Rank

| Luminous Intensity (Iv) | Unit : cd @140mA |      | Unit : lm@140mA |          |
|-------------------------|------------------|------|-----------------|----------|
| Bin Code                | Min.             | Max. | Min.            | Max.     |
| EA                      | 7.1              | 9.0  | 19.5(lm)        | 24.8(lm) |
| EB                      | 9.0              | 11.2 | 24.8(lm)        | 31.6(lm) |

Tolerance on each Intensity bin is +/-11%

#### ■ Wd Rank

| Dominant Wavelength (Wd) |      | Unit : nm @140mA |
|--------------------------|------|------------------|
| Bin Code                 | Min. | Max.             |
| 2                        | 612  | 616              |
| 3                        | 616  | 620              |
| 4                        | 620  | 624              |

Tolerance on each Wavelength bin is +/- 1nm



# SMD LED LTSA-G6SPVAKT

## 5. Typical Electrical / Optical Characteristics Curves.

25°C Ambient Temperature Unless Special Noted

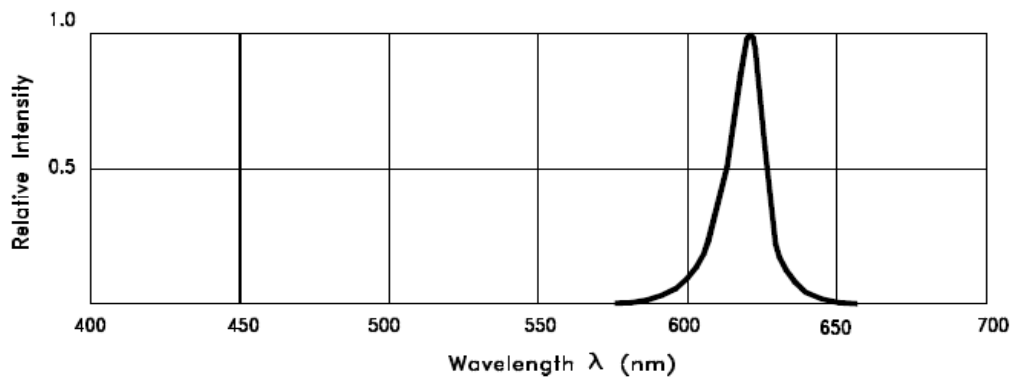


Fig.1 RELATIVE INTENSITY VS. WAVELENGTH

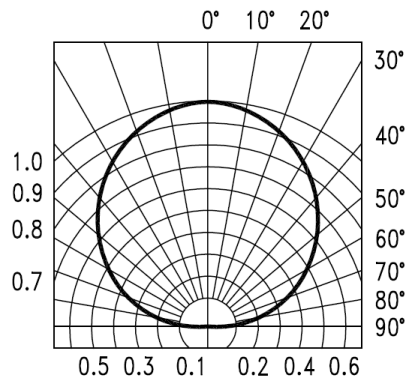


Fig. 2 SPATIAL DISTRIBUTION

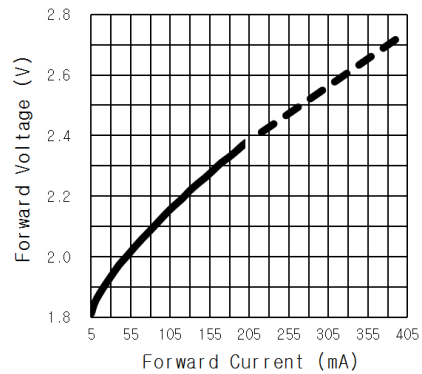


Fig. 3 FORWARD VOLTAGE V.S. FORWARD CURRENT

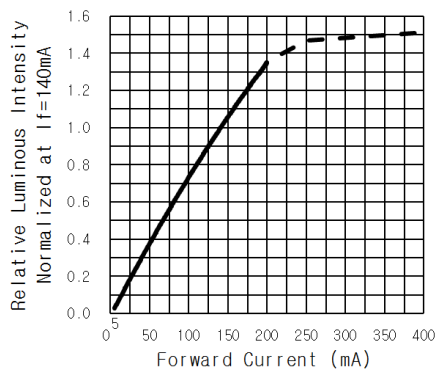


Fig. 4 RELATIVE LUMINOUS INTENSITY V.S. FORWARD CURRENT

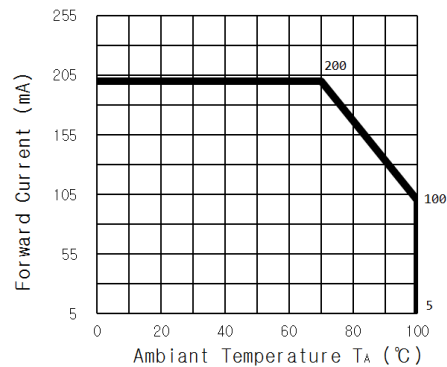


Fig.5 FORWARD CURRENT DERATING CURVE



**SMD LED  
LTSA-G6SPVAKT**

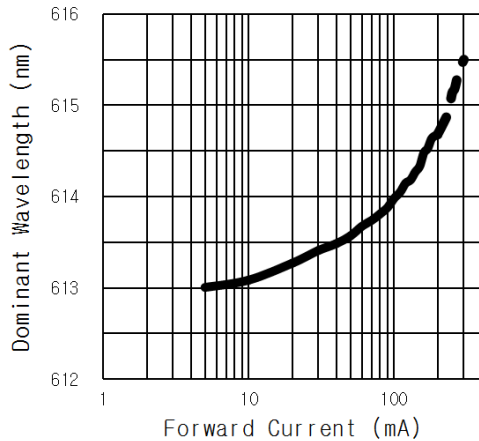


Fig. 5 DOMINANT WAVELENGTH V.S. FORWARD CURRENT

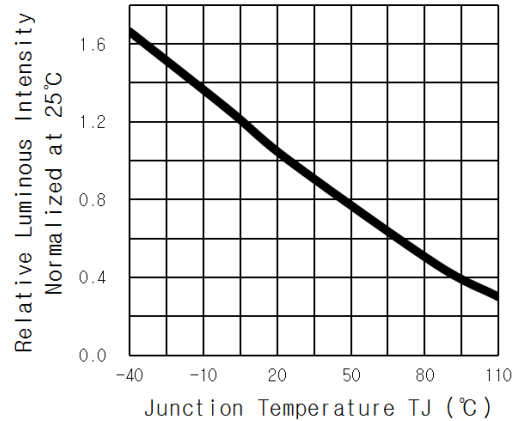


Fig. 7 RELATIVE LUMINOUS INTENSITY V.S. JUNCTION TEMPERATURE

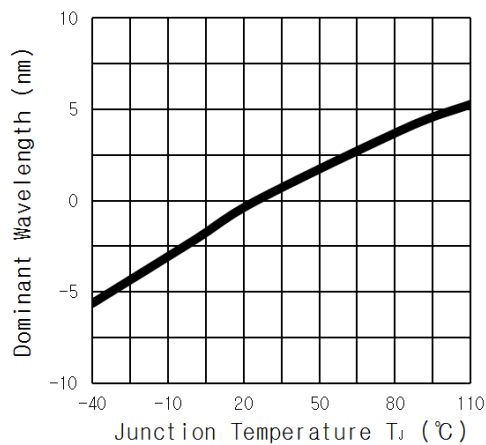


Fig. 8 DOMINANT WAVELENGTH V.S. JUNCTION TEMPERATURE

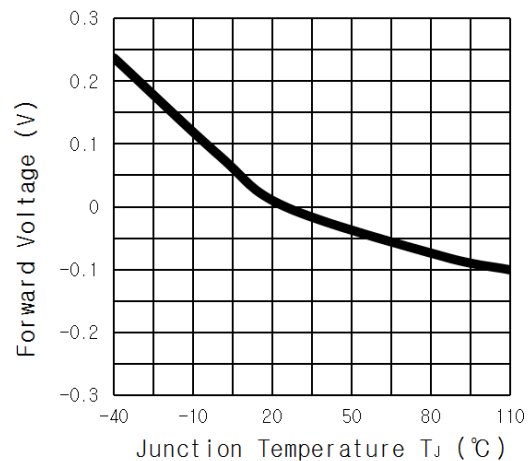


Fig. 9 FORWARD VOLTAGE V.S. JUNCTION TEMPERATURE




## SMD LED LTSA-G6SPVAKT

### 6. User Guide


#### 6.1 Cleaning

Do not use unspecified chemical liquid to clean LED they could harm the package. If cleaning is necessary, immerse the LED in ethyl alcohol or isopropyl alcohol at normal temperature for less one minute.

#### 6.2 Recommend Printed Circuit Board Attachment Pad

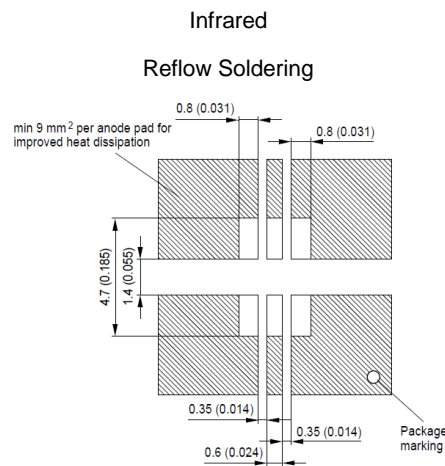

#### 6.3 Package Dimensions of Tape And Reel

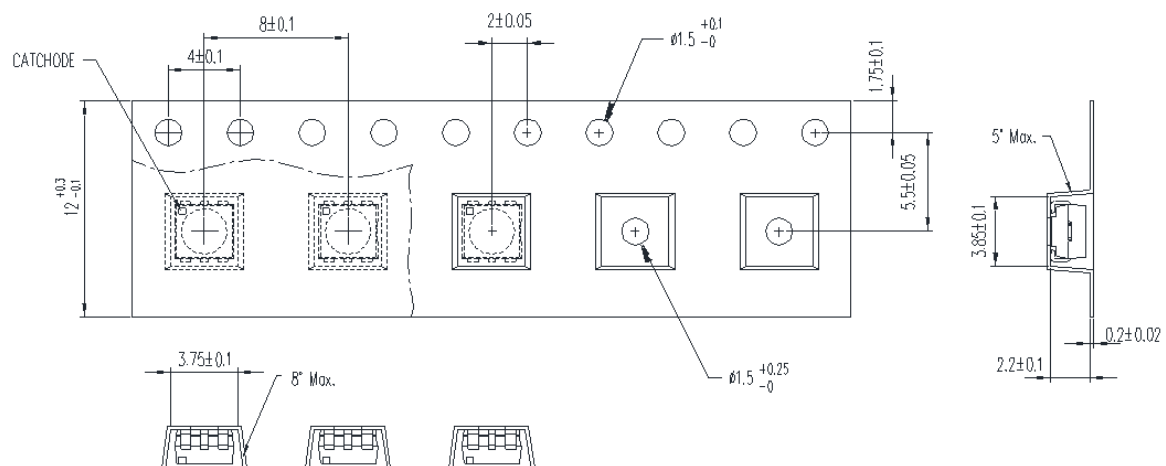


#### Note:

1. All dimensions are in millimeters (inches).



## SMD LED LTSA-G6SPVAKT

### 6.4 Package Dimensions of Reel

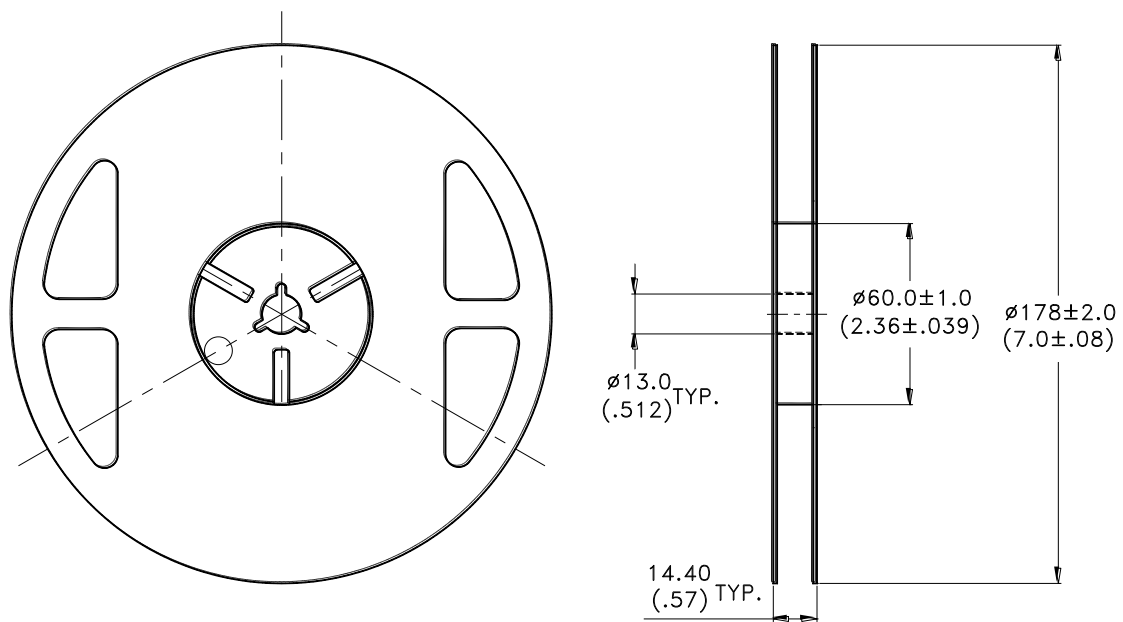

#### Notes:

1. Empty component pockets sealed with top cover tape.
2. 7 inch reel 1000 pieces per reel.
3. Minimum packing quantity is 500 pieces for remainders.
4. The maximum number of consecutive missing lamps is two.
5. In accordance with ANSI/EIA 481 specifications.



## SMD LED LTSA-G6SPVAKT

### 7. Cautions

#### 7.1 Application

The LEDs described here are intended to be used for ordinary electronic equipment (such as office equipment, communication equipment and household applications). Consult Liteon's Sales in advance for information on applications in which exceptional reliability is required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as in aviation, transportation, traffic control equipment, medical and life support systems and safety devices).

#### 7.2 Storage

This product is qualified as Moisture sensitive Level 2 per JEDEC J-STD-020 Precaution when handling this moisture sensitive product is important to ensure the reliability of the product.

The package is sealed:

The LEDs should be stored at 30°C or less and 70%RH or less. And the LEDs are limited to use within one year, while the LEDs is packed in moisture-proof package with the desiccants inside.

The package is opened:

The storage ambient for the LEDs should not exceed 30°C temperature and 60% relative humidity.

It is recommended that LEDs out of their original packaging are IR-reflowed within one year.

For extended storage out of their original packaging, it is recommended that the LEDs be stored in a sealed container with appropriate desiccant, or in a desiccators with nitrogen ambient.

LEDs stored out of their original packaging for more than one year should be baked at about 60 °C for at least 48 hours before solder assembly.

#### 7.3 Cleaning

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED if necessary.

#### 7.4 Soldering

Recommended soldering conditions:

| Reflow soldering |                              | Soldering iron |                                |
|------------------|------------------------------|----------------|--------------------------------|
| Pre-heat         | 150~200°C                    | Temperature    | 300°C Max.                     |
| Pre-heat time    | 120 sec. Max.                | Soldering time | 3 sec. Max.<br>(one time only) |
| Peak temperature | 260°C Max.                   |                |                                |
| Soldering time   | 10 sec. Max.(Max. two times) |                |                                |

#### Notes:

Because different board designs use different number and types of devices, solder pastes, reflow ovens, and circuit boards, no single temperature profile works for all possible combinations.

However, you can successfully mount your packages to the PCB by following the proper guidelines and PCB-specific characterization.

LITE-ON Runs both component-level verification using in-house **KYRAMX98** reflow chambers and board-level assembly. The results of this testing are verified through post-reflow reliability testing. Profiles used at LITE-ON are based on JEDEC standards to ensure that all packages can be successfully and reliably surface mounted.

Figure on page3 shows a sample temperature profile compliant to JEDEC standards. You can use this example as a generic target to set up your reflow process. You should adhere to the JEDEC profile limits as well as specifications and recommendations from the solder paste manufacturer to avoid damaging the device and create a reliable solder joint.




## SMD LED LTSA-G6SPVAKT


### 7.5 Drive Method

A LED is a current-operated device. In order to ensure intensity uniformity on multiple LEDs connected in parallel in an application, it is recommended that a current limiting resistor be incorporated in the drive circuit, in series with each LED as shown in Circuit A below.

**Circuit model A**



**Circuit model B**



(A) Recommended circuit.

(B) The brightness of each LED might appear different due to the differences in the I-V characteristics of those LEDs.

### 7.6 ESD (Electrostatic Discharge)

Static Electricity or power surge will damage the LED.

Suggestions to prevent ESD damage:

- Use of a conductive wrist band or anti-electrostatic glove when handling these LEDs.
- All devices, equipment, and machinery must be properly grounded.
- Work tables, storage racks, etc. should be properly grounded.
- Use ion blower to neutralize the static charge which might have built up on surface of the LED's plastic lens as a result of friction between LEDs during storage and handling.

ESD-damaged LEDs will exhibit abnormal characteristics such as high reverse leakage current, low forward voltage, or "no lightup" at low currents.

To verify for ESD damage, check for "lightup" and  $V_f$  of the suspect LEDs at low currents.

The  $V_f$  of "good" LEDs should be  $>2.0V@0.1mA$  for InGaP product and  $>1.4V@0.1mA$  for AlInGaP product.



# SMD LED LTSA-G6SPVAKT

## 8. Reliability Test

| No. | Test item                                   | Test condition  | Sample size | Reference standard      |
|-----|---|---|-------------|-------------------------|
| 1   | Pre-conditioning                            | MSL 3<br>125°C, 24 hrs baking<br>Moisture Soak 60°C/60% 52 hrs<br>Interval: 15mins ~ 4 hours to do<br>IR-Reflow | 150         | JESD22<br>A-113         |
| 2   | High Temperature Forward Bias (HTFB)        | Ta=70 ± 2°C<br>IF: 200mA<br>1000 hrs  | 30          | JESD22 A-108            |
| 3   | High Temperature Forward Bias (HTFB)        | Ta=100 ± 2°C<br>IF: 100mA<br>1000 hrs   | 30          | JESD22 A-108            |
| 4   | High Temperature High Humidity Bias (HTHHB) | Ta=60°C, Rh=90%<br>IF: 200mA<br>1000 hrs  | 30          | JESD22<br>A-101         |
| 5   | Temperature Cycle I                         | -40°C ± 5°C ~ 100 ± 5°C<br>30min                      30min<br>Transfer time<=1min<br>500cycles                 | 30          | JESD22<br>A-104         |
| 6   | Temperature Cycle II                        | -40°C~ 25°C ~100°C~ 25°C<br>30 min   5 min   30 min   5 min<br>500 cycles                                       | 30          | JESD22<br>A-104         |
| 7   | Resistance to Solder Heat                   | Tsld=260°C, 10sec. 3times   | 30          | JESD22<br>A-111         |
| 8   | Solderability                               | Tsld = 245± 5°C, 5sec,<br>Leas-free Solder  | 11          | J-STD-002<br>JESD22B102 |



## **SMD LED LTSA-G6SPVAKT**

### **9. Others**

The appearance and specifications of the product may be modified for improvement without prior notice.

### **10. Suggested Checking List**

#### Training and Certification

1. Everyone working in a static-safe area is ESD-certified?
2. Training records kept and re-certification dates monitored?

#### Static-Safe Workstation & Work Areas

1. Static-safe workstation or work-areas have ESD signs?
2. All surfaces and objects at all static-safe workstation and within 1 ft measure less than 100V?
3. All ionizer activated, positioned towards the units?
4. Each work surface mats grounding is good?

#### Personnel Grounding

1. Every person (including visitors) handling ESD sensitive (ESDS) items wears wrist strap, heel strap or conductive shoes with conductive flooring?
2. If conductive footwear used, conductive flooring also present where operator stand or walk?
3. Garments, hairs or anything closer than 1 ft to ESD items measure less than 100V\*?
4. Every wrist strap or heel strap/conductive shoes checked daily and result recorded for all DLs?
5. All wrist strap or heel strap checkers calibration up to date?

Note: \*50V for InGaN LED.

#### Device Handling

1. Every ESDS items identified by EIA-471 labels on item or packaging?
2. All ESDS items completely inside properly closed static-shielding containers when not at static-safe workstation?
3. No static charge generators (e.g. plastics) inside shielding containers with ESDS items?
4. All flexible conductive and dissipative package materials inspected before reuse or recycles?

#### Others

1. Audit result reported to entity ESD control coordinator?
2. Corrective action from previous audits completed?
3. Are audit records complete and on file?